



**CALIBRATION CERTIFICATE**


TYPE : SB4-50kN C3 MI7.5                      CAPACITY : 50kN  
RATED OUTPUT                                      SERIAL NUMBER : 12808544  
@ 50kN : 2.00063mV/V

NON-LINEARITY : -0.003% OF R.O.              HYSTERESIS : 0.002% OF R.O.  
CREEP @ 5 MIN : 0.004% OF R.O.              mV/V/ohm CLASSIFICATION : F

TERMINAL RESISTANCE                              INSULATION RESISTANCE  
INPUT : 1,101.13Ω                                      BRIDGE TO ELEMENT > 10GΩ  
OUTPUT : 1,000.24Ω                                      BRIDGE TO SHIELD > 10GΩ  
BRIDGE UNBALANCE : -0.31% OF R.O.              ELEMENT TO SHIELD > 10GΩ

DATE OF CALIBRATION : 28-Sep-19  
TECHNICIAN : RTU

WIRING DIAGRAM

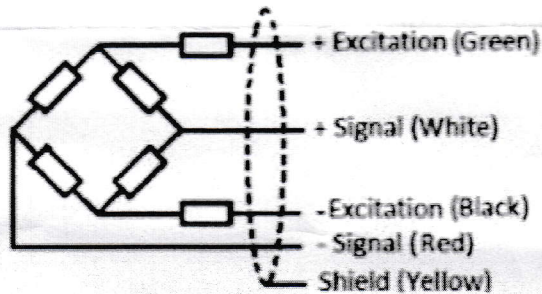

PRODUCED IN ACCORDANCE WITH DRAWING No. 2-20220